

3 Hours



Total marks: 80

\_\_\_\_\_

Exam seat no.

- Question no. 1 is compulsory
- Attempt any Three questions from remaining

Q1. Answer any 4 questions from the given questions:

20

- If system matrix  $A = [-3, 1; -2, 0]$  find the state transition matrix.
- Find the fundamental frequency of the signal

$$x(t) = \cos\left(\frac{10\pi}{3}t\right) + \sin\left(\frac{5\pi}{4}t\right)$$

- Explain the application of Signals and System in Multimedia Processing.
- Express the signals shown in Fig 1 in terms of unit step function



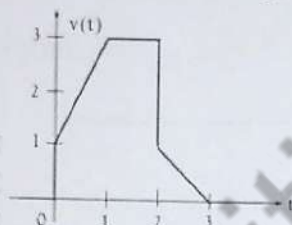


Fig. 1

- Explain Energy and power of a signal.
- Test the given system for linearity, causality, stability, memory and time variant.  
 $y(t) = x(t^2)$
- Explain the application of Signals and System in Multimedia Processing.

Q2. Evaluate  $y(t) = x(t) * h(t)$ , where  $x(t) = u(t) - u(t-3)$  and  $h(t) = u(t) - u(t-2)$   
(a) by an analytical technique, and (b) by a graphical method.

20

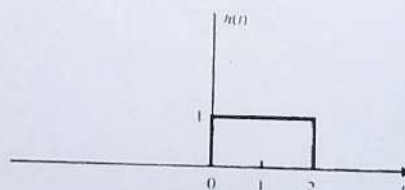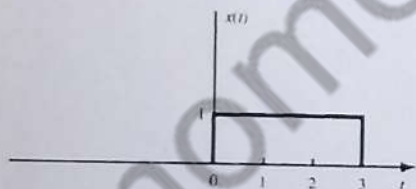

Q3.a. Determine the sequence  $x[n]$  associated with Z-Transform using residue method.

10

$$X(z) = \left\{ \frac{(1-e^{-\alpha})z}{(z-1)(z-e^{-\alpha})} \right\}$$

b. State and Prove Parseval's Theorem with respect to DTFT.

10

Q4.a. Determine the state model of the system governed by the equation

10

$$y[n] = -2y[n-1] + 3y[n-2] + 0.5y[n-3] + 2x[n] + 1.5x[n-1] + 1.5x[n-2] + 4x[n-3]$$

b. Find Fourier series for  $f(x) = x^3(-\pi, \pi)$

10

Q5.a Determine DTFS for the sequence  $x(n) = \cos^2((\pi/8)n)$  8

b. Find Laplace transform of  $\frac{d}{dt} \sin(t) u(t)$ . 8

c. Find Inverse Laplace transform using convolution 4

$$L^{-1} = \left\{ \frac{s^2}{(s^2 + a^2)(s^2 + b^2)} \right\}$$

Q6. Write short note on any two: 20

- a. Feedforward Control system
  - b. ROC in Z-Transform and Laplace Transform
  - c. Relation of ESD, PSD with auto-correlation
-